


Breas Apto® F 01

Technical data

Breas Apto® F01

Pressure/Flow Curve

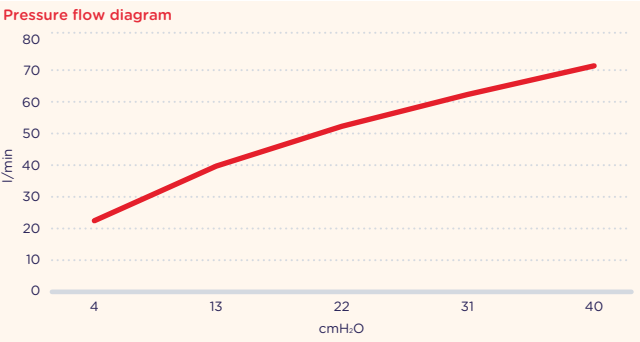

Therapy Pressure Range	4-40 cm/H ₂ O
Dead Space	L: 311 ml, M: 281 ml, S: 243 ml
Resistance	@50 l/min: < 0.2 cm/H ₂ O @100 l/min < 0.6 cm/H ₂ O
AAV Opening / Closing Pressure	< 2.4 cm/H ₂ O
Sound Pressure Level @ 1m	< 20 dB(A)
Dimension (packaging) H x W x D	155 x 125 x 110 mm
Weight (mask)	<120 g
Weight (Inc packaging)	<285 g
Shelf Life	5 Years
Expected Service Life	1 Year
Warranty	90 Days
Frame Material	Nylon
Headgear Material	Nylon/Elastane
Headgear Clips Material	Nylon
Cushion Material	Silicon/Polycarbonate
AAV Material	Silicon
Elbow Body	Polycarbonate
Swivel	Nylon
Elbow Latch	Nylon
Storage and Transport Conditions	-20- 60 °C (-4- 140 °F), clean and dry protected from sunlight
Operating Conditions	Temperature: 5-40 °C (41-104 °F) Humidity: 15- 95 %RH

Be more™

References: Breas Apto® F01 Instructions for Use; Breas Data on File.

Breas, the Breas logo, Apto, and Breas Apto are trademarks of Breas Medical AB. © 2026 Breas Medical AB – All rights reserved. Breas Medical AB reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Breas representative for the most current information.
Issued: May 2026. MAR 008206 Rev_0



Breas Medical AB
Företagsvägen 1, SE-435 33
Mölnlycke, Sweden
+46 31 86 88 00



For more
information
please visit
breas.com/apto